

EUROPEAN PATENT OFFICE

Patent Abstracts of Japan

PUBLICATION NUMBER : 08237848
 PUBLICATION DATE : 13-09-96



APPLICATION DATE : 28-02-95
 APPLICATION NUMBER : 07039627

APPLICANT : DAIICHI GIJUTSU SANGYO KK;
 NIPPON TELEGR & TELEPH CORP
 <NTT>; SHIYODENSHIYA:KK;
 NIPPON TSUSHIN DENZAI KK; TOTSU
 SOKEN:KK;

INVENTOR : YAMAGIWA KOJI; OKAMOTO KOJI;
 JINBO KUNIHIKO; KAWAMURA
 TAKASHI; OIBE KINYA; SASAKI KOHEI;

INT.CL. : H02G 15/113

TITLE : GASKET CONSTRUCTION OF SLEEVE
 OF ENCLOSURE

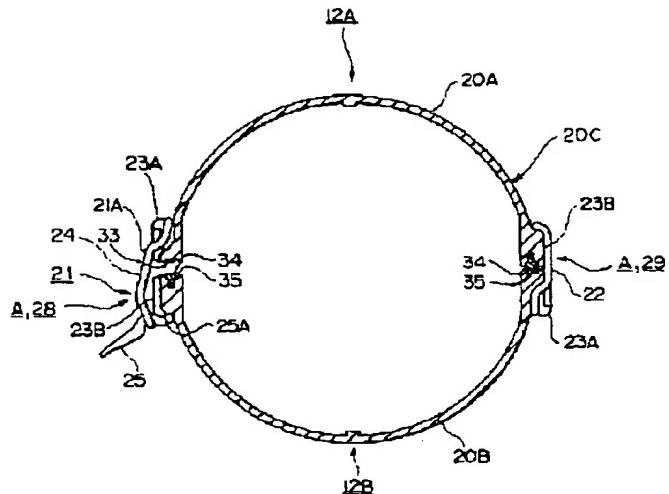

ABSTRACT : PURPOSE: To avoid the drop-offs and discrepancies of gaskets from divided sleeves and improve the tight sealing state of the divided sleeves by a method wherein protrusions formed on the gaskets are fitted to recesses in sleeve trenches to support the gaskets.
 CONSTITUTION: Sleeve trenches 34 are formed in the one side ends of both the edges of divided sleeves 12A and 12B which are to be brought into contact with each other in a longitudinal direction. Gaskets 35 which are held between both the divided sleeves 12A and 12B are provided in the sleeve trenches 34. Protrusions 35A which protrude toward the sleeve trench 34 sides are formed on the gaskets 35 and recesses 34A are formed in the sleeve trenches 34. The protrusions 35A of the gaskets 35 are press-fitted to the recesses 34A in the trenches 34 so as to position and support the gaskets 35 in the sleeve trenches 34. With this constitution, the drop-offs and discrepancies of the gaskets 35 from the divided sleeves 12A and 12B can be avoided and the excellent tight sealing state of a sleeve 20C can be obtained.

COPYRIGHT: (C) JPO